



VALVE SYSTEM SERIE 28

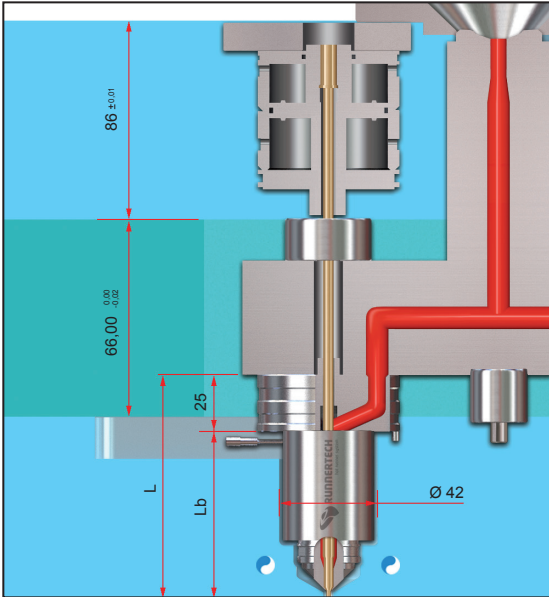


| Ref. | L | Lb |
|--------------|-----|-----|
| RHV28-XX-090 | 90 | 65 |
| RHV28-XX-100 | 100 | 75 |
| RHV28-XX-110 | 110 | 85 |
| RHV28-XX-120 | 120 | 95 |
| RHV28-XX-130 | 130 | 105 |
| RHV28-XX-140 | 140 | 115 |
| } | | |
| RHV28-XX-270 | 270 | 245 |

CODE FOR ORDER:
RHV 28-NV-100

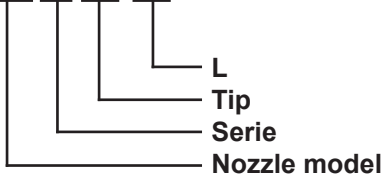


| TECHNICAL SPECIFICATIONS | |
|--------------------------|-----------|
| Diam.Channel | 16 mm |
| Lmin. | 90,00mm |
| Lmax. | 270,00mm |
| Thermocouple | Type J |
| Torque Wrench | 30 mm |
| Torque | 50 N.m |
| Gate Diam. | 2,0-4,0mm |
| Min.Pitch | 90mm |


| Viscosity | Material | Shotweight (g) | | | |
|-----------|------------------|----------------|------|------|------|
| | | NV | CV | BV | SV |
| High | PP, PS, PE... | 1000 | 1000 | 1000 | 1000 |
| Medium | ABS, POM, SAN... | 600 | 600 | 600 | 600 |
| Low | PC, PBT... | 300 | 300 | 300 | 300 |




NV TYPE



CV TYPE



BV TYPE



SV TYPE

Download your Cad file at www.runner-tech.com